

PLATFORM SCALES WITH PLASTIC HEAD



release date 26-04-2017



Platform scales WPT series are designed for direct trade, and they easily are used in applications requiring fast and precise determination of net weight.

WPT series features an indicator PUE C/31 series comprising backlit LCD display.

Depending on scale version, the indicator is installed on:

- a pillar with possibility of adjusting the angle (WPT version);

- a cable (WPT/K version);

- attached to the weighing platform (WPT/R version).

WPT scale is manufactured using powder coated mild steel profiles, with stainless steel weighing platform.

WPT series is powered either from mains or by batteries (6×AA).



Parts counting



Plus/minus control



Percent weighing



Animal weighing



Totalizing



Internal battery



Peak hold




Newton unit measurement

Technical data:

	WPT 6 F1	WPT 15 F1	WPT 30 F1	WPT 30 C2	WPT 60 C2	WPT 150 C2	WPT 300 C2	WPT 150 C3	WPT 300 C3
	WPT 6 F1/K	WPT 15 F1/K	WPT 30 F1/K	WPT 30 C2/K	WPT 60 C2/K	WPT 150 C2/K	WPT 300 C2/K	WPT 150 C3/K	WPT 300 C3/K
	WPT 6 F1/R	WPT 15 F1/R	WPT 30 F1/R	WPT 30 C2/R	WPT 60 C2/R	WPT 150 C2/R	-	-	-
Max capacity	6 kg	15 kg	30 kg	30 kg	60 kg	150 kg	300 kg	150 kg	300 kg
Minimum load	40 g	100 g	200 g	200 g	400 g	1 kg	2 kg	1 kg	2 kg
Readability	2 g	5 g	10 g	10 g	20 g	50 g	100 g	50 g	100 g
Tare range	-6 kg	-15 kg	-30 kg	-30 kg	-60 kg	-150 kg	-300 kg	-150 kg	-300 kg
Pan size	300 × 300 mm			400 × 500 mm				500 × 700 mm	
Working temperature	-10° ÷ +40 °C								
Relative atmospheric humidity	10 ÷ 85 % RH no condensation								
Output signal	RS 232								
IP rating	IP 65 - platform, IP 43 - indicator								
Power supply	100 ÷ 240 V AC 50 ÷ 60 Hz / 12 V DC and battery								
Operation time on batteries	~ 35 h								
Display	LCD (backlit)								
Net weight / Gross weight	5,2 / 6 kg			15,5 / 17,8 kg				20,5 / 26,8 kg	
Packaging size	570×390×170 mm			720×580×220 mm				820×640×260 mm	

Technical data:

	WPT 3/6 F1	WPT 6/15 F1	WPT 15/30 F1	WPT 15/30 C2	WPT 30/60 C2	WPT 60/150 C2	WPT 150/300 C2
	WPT 3/6 F1/K	WPT 6/15 F1/K	WPT 15/30 F1/K	WPT 15/30 C2/K	WPT 30/60 C2/K	WPT 60/150 C2/K	WPT 150/300 C2/K
	WPT 3/6 F1/R	WPT 6/15 F1/R	WPT 15/30 F1/R	WPT 15/30 C2/R	WPT 30/60 C2/R	WPT 60/150 C2/R	-
Max capacity	3 / 6 kg	6 / 15 kg	15 / 30 kg	15 / 30 kg	30 / 60 kg	60 / 150 kg	150 / 300 kg
Minimum load	20 / 40 g	40 / 100 g	100 / 200 g	100 / 200 g	200 / 400 g	400 / 1000 g	1 / 2 kg
Readability	1 / 2 g	2 / 5 g	5 / 10 g	5 / 10 g	10 / 20 g	20 / 50 g	50 / 100 g
Tare range	-6 kg	-15 kg	-30 kg	-30 kg	-60 kg	-150 kg	-300 kg
Pan size	300 × 300 mm			400 × 500 mm			
Working temperature	-10° ÷ +40 °C						
Relative atmospheric humidity	10 ÷ 85 % RH no condensation						
Output signal	RS 232						
IP rating	IP 65 - platform, IP 43 - indicator						
Power supply	100 ÷ 240 V AC 50 ÷ 60 Hz / 12 V DC and battery						
Operation time on batteries	~ 35 h						
Display	LCD (backlit)						
Net weight / Gross weight	5,2 / 6 kg			15,5 / 17,8 kg			
Packaging size	570×390×170 mm			720×580×220 mm			

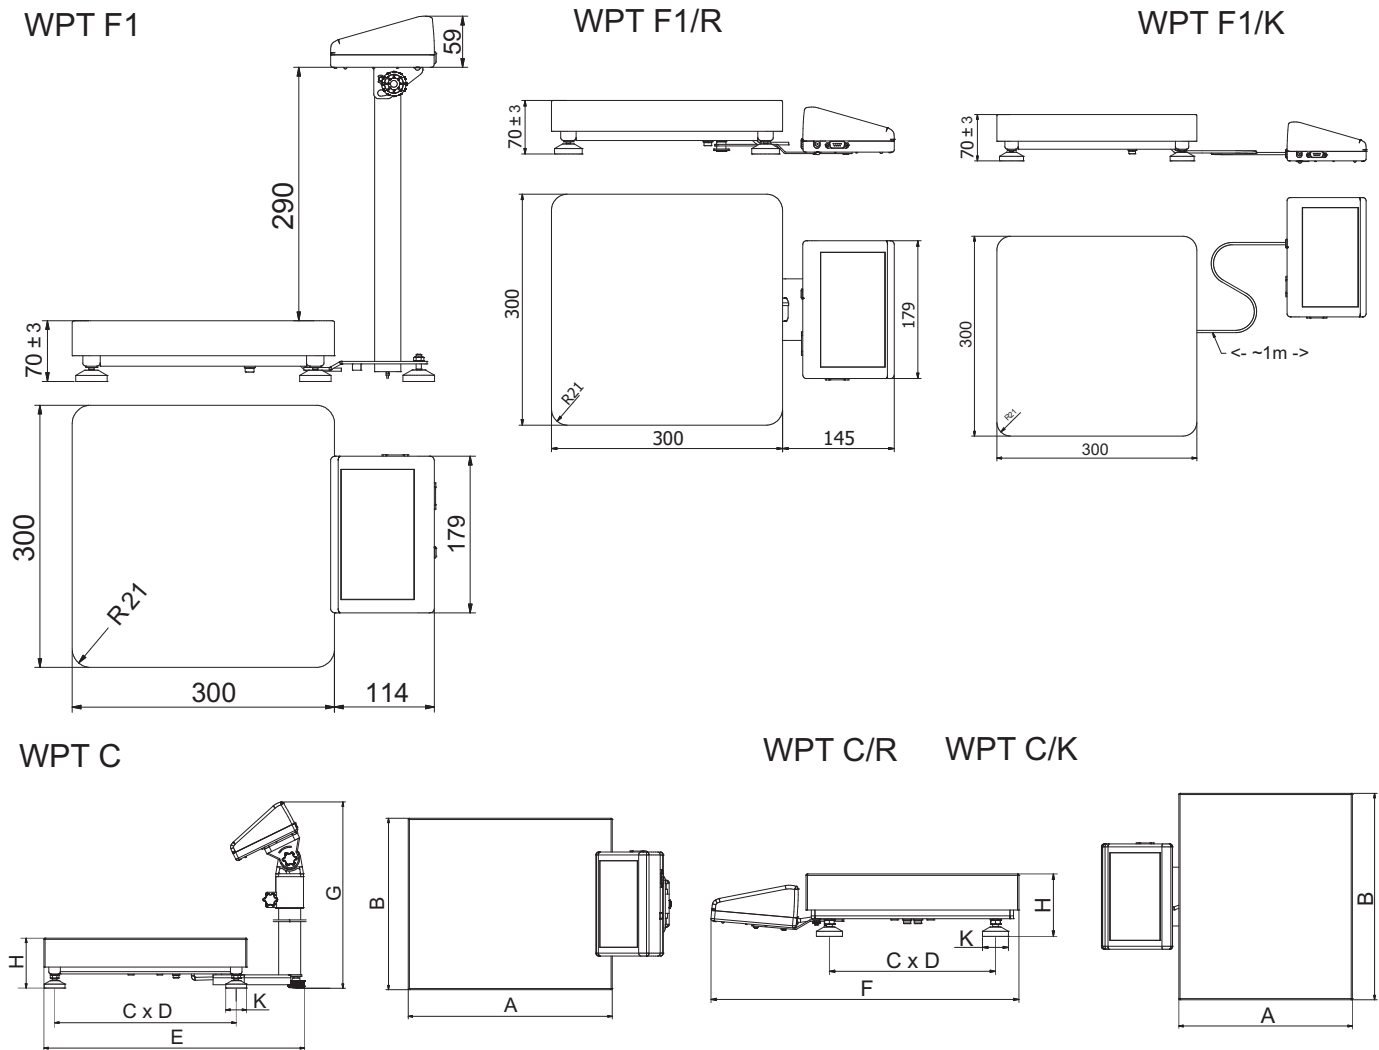

Name	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	E [mm]	F [mm]	G [mm]	K [mm]
WPT ... F1	300	300	256	226	70±3	451	-	419	Ø 36
WPT ... F1/K	300	300	256	226	70±3	-	-	-	Ø 36
WPT ... F1/R	300	300	256	226	70±3	-	427	-	Ø 36
WPT ... C2	402	502	350	425	103±5	509	-	751	Ø 36
WPT ... C2/K	402	502	350	425	103±5	-	-	-	Ø 36
WPT ... C2/R	402	502	350	425	103±5	-	544	-	Ø 36
WPT ... C3	701	501	628	428	130±5	817	-	754	Ø 50
WPT ... C3/K	701	501	628	428	130±5	-	-	-	Ø 50

Additional equipment:

ANTI-VIBRATION TABLE	EXTERNAL POWER OUTPUT
EPSON DOT MATRIX PRINTER	TABLE FOR SCALE
ANTI-DUST CASE FOR EPSON PRINTER	R-LAB COMPUTER SOFTWARE
STAND FOR THE INDICATOR	LS-FS COMPUTER SOFTWARE
HANDLE FOR INDICATOR IN PLASTIC HOUSING	RS 232 CABLE: SCALE - "EPSON" PRINTER: P0151
RS 232 / RS 485 CONVERTER KR-01	RS 232 CABLE: SCALE - COMPUTER: P0108
RS 232 / ETHERNET CONVERTER KR-04	POWER CORD WITH JACK FOR CAR LIGHTER: K0047
LCD DISPLAY WWG-2 (DIGIT HEIGHT 4,5")	LCD DISPLAY IN STAINLESS STEEL HOUSING
LCD DISPLAY IN PLASTIC HOUSING	